



STATIONARY INFANTRY TARGET (SIT)

InVeris Training Solutions' Stationary Infantry Target (SIT) is a remote controlled pop-up target actuator, capable of supporting US Army type-E, F and 3-D targets, as well as fig 11, fig 12 and fig 15 NATO target silhouettes

The SIT actuators are addressed individually and can be controlled individually, in unison, or in groups; either manually or as part of a pre-programmed scenario. The infantry targets adapt to a variety of range environments, infrastructures and operational constraints, and do not contain hydraulic fluids, contaminants or hazardous toxins.

With more than 44,000 infantry target systems successfully fielded throughout the world, InVeris' target designs are factory configured to support the communication method and power requirements specified for each range. Lightweight and portable, SITs are easily transported and stacked for deployment or storage. The SIT performs all standard target commands such as expose, conceal, hit-fall, hit-hold and hit-bob. The user can easily program any combination of commands in scenario mode without affecting the default settings.

Capable of operating as a master or slave target with up to 100 individual SITs assigned to a group, the target group can be commanded to respond in unison. In doing so, a hit on one target can cause all targets in the group to fall, or respond as otherwise commanded. Each target within a group retains its own unique address and reacts to commands individually. There is no need for cabling to interconnect target mechanisms in the master/slave configuration.


Each target's hit sensitivity can be selected remotely from the InVeris Range Control System (RCS), allowing it to adapt to a vast array of munitions. The actuator reports attributes, status, and hit data back to the RCS in real time, allowing for quick adjustments in training situations.



SIT SPECIFICATIONS

SPECIFICATION	VALUE
Communication System	VHF, UHF, Ethernet, Serial (factory configurable)
Hit Sensing	600 hits/minutes
Hit Sensitivity	Remotely adjustable
Expose/Conceal Time	Less than 1 second
Target Type	All industry standard US Army and NATO targets and 3D Ivan
Max Target Weight	10 lbs or 4.5 kg
Wind	35 mph (56 kph) safe operation
Power	12VDC, 120VAC 60hz, 230/240VAC 50/60hz
Weight	50 lb (22.6 kg) excluding battery
Dimensions (exposed)	12" W x 18" L x 20" H (30 x 46 x 51 cm)
Dimensions (concealed)	11" W x 18" L x 24" H (28 x 46 x 61 cm)
Watertight	IP65
Operating Temp Range	-20F to 140F or (-29C to 60C)
Other	Supports optional add-on muzzle flash, moonlight simulators and MILES equipment
Option(s)	Available in double target arm to present two targets simultaneously

EXAMPLES OF FIELDIED SITS

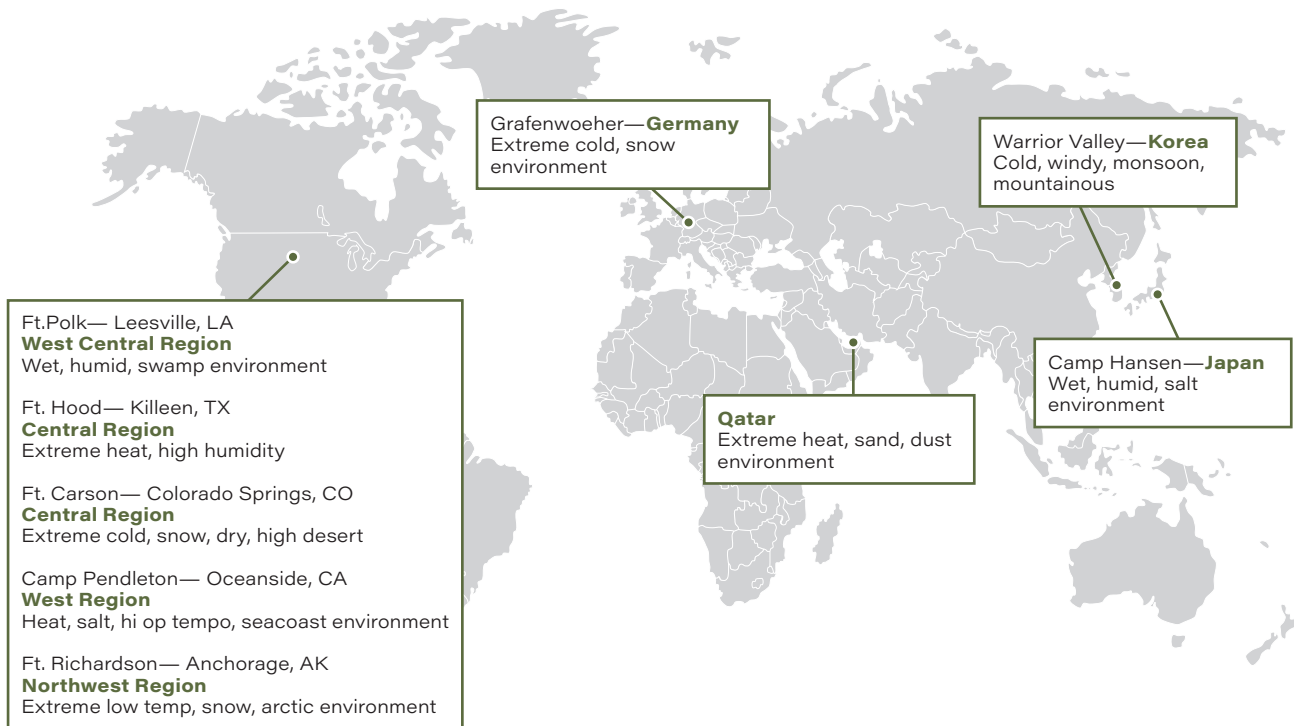

ITS-MilitarySales@inveristraining.com | 1.800.813.9046
 296 Brogdon Road | Suwanee, GA 30024 USA

inveristraining.com

